




Brass UNIVERSAL CHECK VALVE
 WITH STAINLESS STEEL FILTER
 Rubber seat, plastic
 Threaded FF ISO228/1
 Temperature: min 0°C
 max +80°C
 Nominal pressure max 16bar

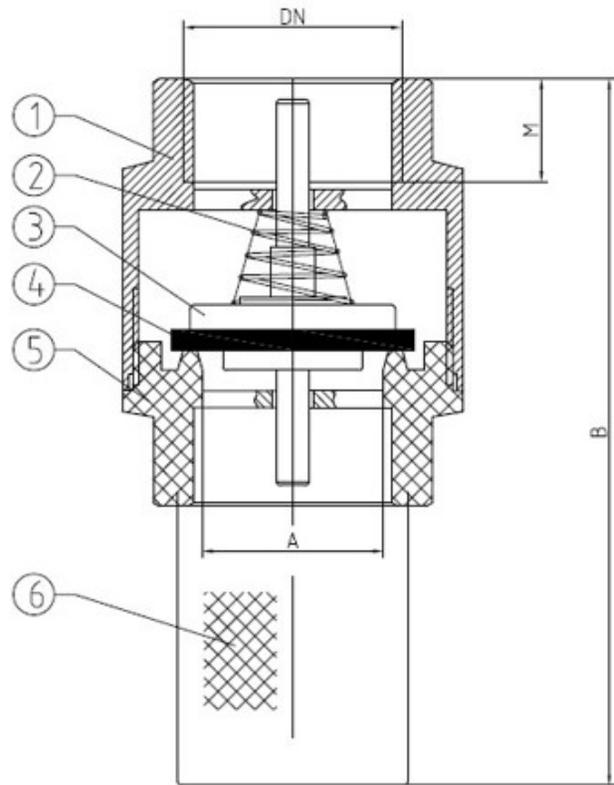

NO	Component	Material
1	body	brass
2	Spring	Stainless
3	Disc	plastic
4	Gasket	Rubber nbr
5	Body nut	brass
6	Filter	Stainless steel

DN	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A	18	24	29	38	44	56
B	65	76	85	101	117	137
M1/M2	10.5	11	11.5	12.5	13	15
PN	16	16	16	16	16	16