


Kabelschoenogen 45 graden



Materiaal : Elektrolytisch Koper conform EN 13600
 Coating : Vertind
 Gewricht : Klemkoppeling
 Dikte : Erg dik
 Kabel invoer : Lang

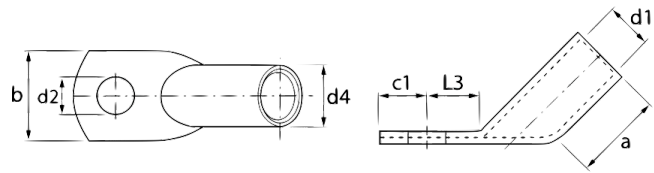

All rights reserved.

Kabelschoenen 45°

DG artikelnummer	Cable Section (mm ²)	Bolt	Dimensions							EH	EH gewicht
			d1	d4	a	d2	b	c1	L3		
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[kg]
3420605	6	M5	3,5	6,5	9,0	5,5	10,0	7,5	9,0	5	0,030
3420606		M6	3,5	6,5	9,0	6,5	12,0	7,5	10,0	5	0,031
3420608		M08	3,5	6,5	9,0	8,5	14,0	10,0	13,0	5	0,032
3421005	10	M05	4,5	7,5	10,0	5,5	12,0	6,5	10,0	5	0,024
3421006		M06	4,5	7,5	10,0	6,5	12,0	6,5	10,0	5	0,028
3421008		M08	4,5	7,5	10,0	8,5	15,0	10,0	13,0	5	0,036
3421605	16	M05	5,5	8,5	13,0	5,5	12,0	7,5	10,0	5	0,052
3421606		M06	5,5	8,5	13,0	6,5	12,0	7,5	11,0	5	0,052
3421608		M08	5,5	8,5	13,0	8,5	15,0	10,0	13,0	5	0,058
3421610		M10	5,5	8,5	13,0	10,5	17,0	12,0	15,0	5	0,080
3422505	25	M05	7,0	10,0	15,0	5,5	14,0	7,5	11,0	5	0,098
3422506		M06	7,0	10,0	15,0	6,5	14,0	7,5	11,0	5	0,070
3422508		M08	7,0	10,0	15,0	8,5	16,0	10,0	13,0	5	0,075
3422510		M10	7,0	10,0	15,0	10,5	18,0	12,0	15,0	5	0,083
		M12	7,0	10,0	15,0	13,0	19,0	13,0	18,0	5	0,083
3423506	35	M06	8,5	12,0	17,0	6,5	17,0	7,5	11,0	5	0,120
3423508		M08	8,5	12,0	17,0	8,5	17,0	10,0	13,0	5	0,120
3423510		M10	8,5	12,0	17,0	10,5	19,0	12,0	15,0	5	0,125
		M12	8,5	12,0	17,0	13,0	21,0	13,0	18,0	5	0,150
3425006	50	M06	10,0	14,0	19,0	6,5	20,0	10,0	13,0	5	0,181
3425008		M08	10,0	14,0	19,0	8,5	20,0	10,0	13,0	5	0,181
3425010		M10	10,0	14,0	19,0	10,5	20,0	12,0	16,0	5	0,188
3425012		M12	10,0	14,0	19,0	13,0	23,0	13,0	18,0	5	0,214
3427006	70	M06	12,0	16,5	21,0	6,5	23,0	10,0	13,0	5	0,267
3427008		M08	12,0	16,5	21,0	8,5	23,0	10,0	14,0	5	0,250
3427010		M10	12,0	16,5	21,0	10,5	23,0	12,0	16,0	5	0,267
3427012		M12	12,0	16,5	21,0	13,0	23,0	13,0	18,0	5	0,270
3429508	95	M08	13,5	18,0	25,0	8,5	26,0	12,0	14,0	5	0,313
3429510		M10	13,5	18,0	25,0	10,5	26,0	12,0	17,0	5	0,325
3429512		M12	13,5	18,0	25,0	13,0	26,0	13,0	18,0	5	0,350
3429516		M16	13,5	18,0	25,0	17,0	28,0	16,0	22,0	5	0,350
34212008	120	M08	15,0	19,5	26,0	8,5	28,0	14,0	16,0	5	0,383
34212010		M10	15,0	19,5	26,0	10,5	28,0	14,0	17,0	5	0,383
34212012		M12	15,0	19,5	26,0	13,0	28,0	14,0	18,0	5	0,383
34212016		M16	15,0	19,5	26,0	17,0	30,0	16,0	22,0	5	0,367
34215008	150	M08	16,5	21,0	30,0	8,5	31,0	14,0	16,0	5	0,480
34215010		M10	16,5	21,0	30,0	10,5	31,0	14,0	17,0	5	0,440
34215012		M12	16,5	21,0	30,0	13,0	31,0	15,0	18,0	5	0,480
		M16	16,5	21,0	30,0	17,0	31,0	16,0	22,0	5	0,460
		M20	16,5	21,0	30,0	21,0	36,0	22,0	24,0	5	0,460
34218510	185	M10	19,0	24,0	30,0	10,5	35,0	18,0	22,0	5	0,675
34218512		M12	19,0	24,0	30,0	13,0	35,0	18,0	22,0	5	0,675
34218516		M16	19,0	24,0	30,0	17,0	35,0	18,0	22,0	5	0,600
		M20	19,0	24,0	30,0	21,0	39,0	22,0	24,0	5	0,600
34224010	240	M10	21,0	26,0	35,0	10,5	39,0	21,5	22,0	5	0,800
34224012		M12	21,0	26,0	35,0	13,0	39,0	21,5	22,0	5	0,833
34224016		M16	21,0	26,0	35,0	17,0	39,0	21,5	22,0	5	0,800
		M20	21,0	26,0	35,0	21,0	39,0	21,5	24,0	5	0,767