


Cable Lugs DIN 46235



Material : Elektrolytic Copper conformed to EN 13600
 Coating : Tin Plated
 Gewricht : Clamp Coupling
 Conformed to DIN 46235

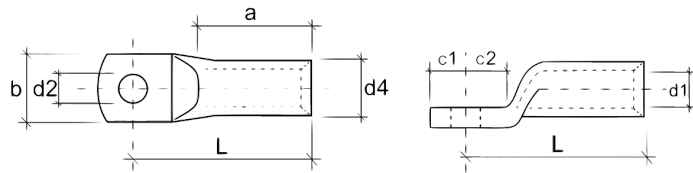



All rights reserved.

Kabelschoenen DIN 46235

DG Art.nr	Cable Section (mm ²)	Bolt	Dimensions								EH	EH gewicht [kg]
			d1 [mm]	d4 [mm]	a [mm]	d2 [mm]	b [mm]	c1 [mm]	c2 [mm]	L [mm]		
3430605	6	M5	3,8	5,5	10,0	5,3	8,5	6,5	7,5	24,0	20	0,063
3430606		M6	3,8	5,5	10,0	6,4	8,5	7,5	8,0	24,0	20	0,060
3430608		M08	3,8	5,5	10,0	8,4	13,0	10,0	10,0	24,0	20	0,063
3431005	10	M05	4,5	6,0	10,0	5,3	9,0	7,0	8,5	27,0	20	0,072
3431006		M06	4,5	6,0	10,0	6,4	9,0	7,5	8,5	27,0	20	0,068
3431008		M08	4,5	6,0	10,0	8,4	13,0	10,0	10,0	27,0	20	0,072
3431606	16	M06	5,5	8,5	20,0	6,4	13,0	7,5	8,0	36,0	20	0,240
		M08	5,5	8,5	20,0	8,4	13,0	10,0	10,0	36,0	20	0,240
		M10	5,5	8,5	20,0	10,5	17,0	12,0	12,0	36,0	20	0,240
3431612		M12	5,5	8,5	20,0	13,0	18,0	13,0	13,0	36,0	20	0,240
3432506	25	M06	7,0	10,0	20,0	6,4	14,0	7,5	8,0	38,0	20	0,297
3432508		M08	7,0	10,0	20,0	8,4	16,0	10,0	8,0	38,0	20	0,309
3432510		M10	7,0	10,0	20,0	10,5	17,0	12,0	8,0	38,0	20	0,309
3432512		M12	7,0	10,0	20,0	13,0	19,0	13,0	8,0	38,0	20	0,307
3433506	35	M06	8,2	12,5	20,0	6,4	17,0	7,5	8,0	42,0	20	0,560
		M08	8,2	12,5	20,0	8,4	17,0	10,0	10,0	42,0	20	0,560
		M10	8,2	12,5	20,0	10,5	19,0	12,0	12,0	42,0	20	0,600
3433512		M12	8,2	12,5	20,0	13,0	21,0	13,0	13,0	42,0	20	0,560
3433514		M14	8,2	12,5	20,0	15,0	21,0	14,5	14,5	42,0	20	0,520
3435008	50	M08	10,0	14,5	28,0	8,4	20,0	10,0	10,0	52,0	10	0,450
3435010		M10	10,0	14,5	28,0	10,5	22,0	12,0	12,0	52,0	10	0,450
3435012		M12	10,0	14,5	28,0	13,0	24,0	13,0	13,0	52,0	10	0,450
3435014		M14	10,0	14,5	28,0	15,0	24,0	14,5	14,5	52,0	10	0,450
3435016		M16	10,0	14,5	28,0	17,0	28,0	16,0	16,0	52,0	10	0,450
3437008	70	M08	11,5	16,5	28,0	8,4	24,0	10,0	10,0	55,0	10	0,600
3437010		M10	11,5	16,5	28,0	10,5	24,0	12,0	12,0	55,0	10	0,620
3437012		M12	11,5	16,5	28,0	13,0	24,0	13,0	13,0	55,0	10	0,600
3437014		M14	11,5	16,5	28,0	15,0	24,0	14,5	14,5	55,0	10	0,600
3437016		M16	11,5	16,5	28,0	17,0	30,0	16,0	16,0	55,0	10	0,600
3439508	95	M08	13,5	19,0	35,0	8,4	28,0	12,0	12,0	65,0	10	0,914
		M10	13,5	19,0	35,0	10,5	28,0	12,0	12,0	65,0	10	0,914
		M12	13,5	19,0	35,0	13,0	28,0	13,0	13,0	65,0	10	0,886
3439514		M14	13,5	19,0	35,0	15,0	28,0	14,5	14,5	65,0	10	0,914
3439516		M16	13,5	19,0	35,0	17,0	32,0	16,0	16,0	65,0	10	0,914
34312010	120	M10	15,5	21,0	35,0	10,5	32,0	15,0	16,0	70,0	10	1,133
34312012		M12	15,5	21,0	35,0	13,0	32,0	16,0	17,0	70,0	10	1,133
34312014		M14	15,5	21,0	35,0	15,0	32,0	18,0	19,0	70,0	10	1,133
34312016		M16	15,5	21,0	35,0	17,0	32,0	19,0	20,0	70,0	10	1,133
34312020		M20	15,5	21,0	35,0	21,0	32,0	21,0	22,0	70,0	10	1,133
34315010	150	M10	17,0	23,5	35,0	10,5	34,0	15,0	16,0	78,0	10	1,667
34315012		M12	17,0	23,5	35,0	13,0	34,0	16,0	17,0	78,0	10	1,667
34315014		M14	17,0	23,5	35,0	15,0	34,0	19,0	20,0	78,0	10	1,667
34315016		M16	17,0	23,5	35,0	17,0	34,0	19,0	20,0	78,0	10	1,667
34315020		M20	17,0	23,5	35,0	21,0	40,0	21,0	22,0	78,0	10	2,267

Kabelschoenen DIN 46235

DG Art.nr	Cable Section (mm ²)	Bolt	Dimensions								EH	EH gewicht [kg]
			d1 [mm]	d4 [mm]	a [mm]	d2 [mm]	b [mm]	c1 [mm]	c2 [mm]	L [mm]		
34318510	185	M10	19,0	25,5	40,0	10,5	37,0	15,0	16,0	82,0	10	1,917
34318512		M12	19,0	25,5	40,0	13,0	37,0	16,0	17,0	82,0	10	1,917
34318514		M14	19,0	25,5	40,0	15,0	37,0	19,0	20,0	82,0	10	1,917
34318516		M16	19,0	25,5	40,0	17,0	37,0	19,0	20,0	82,0	10	1,917
34318520		M20	19,0	25,5	40,0	21,0	40,0	21,0	22,0	82,0	10	1,833
34324012	240	M12	21,5	29,0	40,0	13,0	42,0	16,0	17,0	92,0	10	2,750
34324014		M14	21,5	29,0	40,0	15,0	42,0	19,0	20,0	92,0	10	2,875
34324016		M16	21,5	29,0	40,0	17,0	42,0	19,0	20,0	92,0	10	2,750
34324020		M20	21,5	29,0	40,0	21,0	45,0	21,0	22,0	92,0	10	2,750
34330014	300	M14	24,5	32,0	50,0	15,0	48,0	19,0	22,0	100,0	10	3,375
34330016		M16	24,5	32,0	50,0	17,0	48,0	19,0	22,0	100,0	10	3,375
34330020		M20	24,5	32,0	50,0	21,0	48,0	19,0	22,0	100,0	10	3,375
34340014	400	M14	27,5	38,5	70,0	15,0	55,0	25,0	25,0	115,0	10	6,800
34340016		M16	27,5	38,5	70,0	17,0	55,0	25,0	25,0	115,0	10	6,600
34340020		M20	27,5	38,5	70,0	21,0	55,0	25,0	25,0	115,0	10	6,400
	500	M16	31,0	42,0	70,0	17,0	60,0	25,0	25,0	125,0	10	8,500
		M20	31,0	42,0	70,0	21,0	60,0	25,0	25,0	125,0	10	8,500
	625	M16	34,5	44,0	80,0	17,0	60,0	25,0	25,0	135,0	10	8,667
		M20	34,5	44,0	80,0	21,0	60,0	25,0	25,0	135,0	10	8,333
	800	M16	40,0	52,0	100,0	17,0	75,0	30,0	30,0	165,0	10	15,500
		M20	40,0	52,0	100,0	21,0	75,0	30,0	30,0	165,0	10	15,000
	1000	M16	44,0	58,0	100,0	17,0	85,0	30,0	30,0	165,0	10	20,000
		M20	44,0	58,0	100,0	21,0	85,0	30,0	30,0	165,0	10	18,500

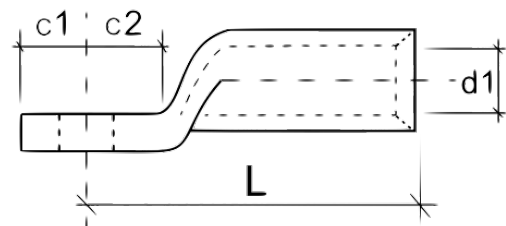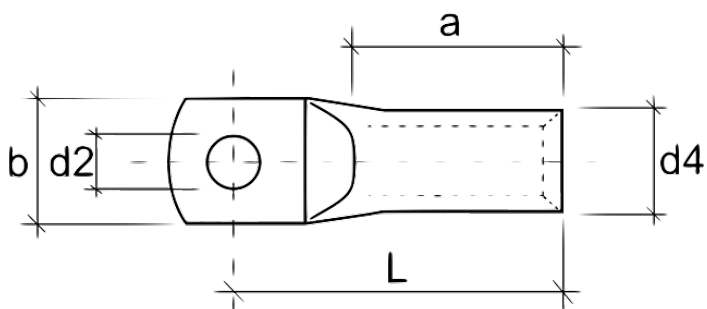

All rights reserved.