


Kabelschoenogen 90 graden



Materiaal : Elektrolytisch Koper conform EN 13600
 Coating : Vertind
 Gewricht : Klemkoppeling
 Dikte : Erg dik
 Kabel invoer : Lang

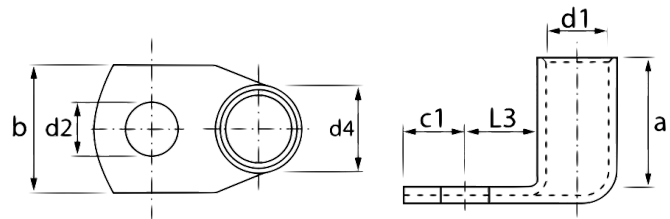

All rights reserved.

Kabelschoenen 90°

DG art.nr	Cable Section (mm ²)	Bolt	Dimensions							EH	EH gewicht
			d1	d4	a	d2	b	c1	L3		
			[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]		[kg]
3440605	6	M5	3,5	6,5	13,0	5,5	10,0	7,5	9,0	5	0,032
3440606		M6	3,5	6,5	13,0	6,5	12,0	5,6	10,0	5	0,033
3440608		M08	3,5	6,5	13,0	8,5	14,0	10,0	13,0	5	0,033
3441005	10	M05	4,5	7,5	14,0	5,5	12,0	6,5	10,0	5	0,030
3441006		M06	4,5	7,5	14,0	6,5	12,0	6,5	10,0	5	0,029
3441008		M08	4,5	7,5	14,0	8,5	15,0	10,0	13,0	5	0,033
3441605	16	M05	5,5	8,5	17,0	5,5	12,0	7,5	10,0	5	0,055
3441606		M06	5,5	8,5	17,0	6,5	12,0	7,5	11,0	5	0,057
3441608		M08	5,5	8,5	17,0	8,5	15,0	10,0	13,0	5	0,060
3441610		M10	5,5	8,5	17,0	10,5	17,0	12,0	15,0	5	0,058
3442505	25	M05	7,0	10,0	19,0	5,5	14,0	7,5	11,0	5	0,083
3442506		M06	7,0	10,0	19,0	6,5	14,0	7,5	11,0	5	0,083
3442508		M08	7,0	10,0	19,0	8,5	16,0	10,0	13,0	5	0,080
3442510		M10	7,0	10,0	19,0	10,5	18,0	12,0	15,0	5	0,087
3442512		M12	7,0	10,0	19,0	13,0	19,0	13,0	18,0	5	0,077
3443506	35	M06	8,5	12,0	23,0	6,5	17,0	7,5	11,0	5	0,120
3443508		M08	8,5	12,0	23,0	8,5	17,0	10,0	13,0	5	0,125
3443510		M10	8,5	12,0	23,0	10,5	19,0	12,0	15,0	5	0,135
3443512		M12	8,5	12,0	23,0	13,0	21,0	13,0	18,0	5	0,135
3445006	50	M06	10,0	14,0	25,0	6,5	20,0	10,0	13,0	5	0,188
3445008		M08	10,0	14,0	25,0	8,5	20,0	10,0	13,0	5	0,188
3445010		M10	10,0	14,0	25,0	10,5	20,0	12,0	16,0	5	0,200
3445012		M12	10,0	14,0	25,0	13,0	23,0	13,0	18,0	5	0,200
3447006	70	M06	12,0	16,5	29,0	6,5	23,0	10,0	13,0	5	0,320
3447008		M08	12,0	16,5	29,0	8,5	23,0	10,0	14,0	5	0,310
3447010		M10	12,0	16,5	29,0	10,5	23,0	12,0	16,0	5	0,290
3447012		M12	12,0	16,5	29,0	13,0	23,0	13,0	18,0	5	0,270
3449508	95	M08	13,5	18,0	33,0	8,5	26,0	12,0	14,0	5	0,338
3449510		M10	13,5	18,0	33,0	10,5	26,0	12,0	17,0	5	0,350
3449512		M12	13,5	18,0	33,0	13,0	26,0	13,0	18,0	5	0,350
		M16	13,5	18,0	33,0	17,0	28,0	16,0	22,0	5	0,357
34412008	120	M08	15,0	19,5	36,0	8,5	28,0	14,0	16,0	5	0,400
34412010		M10	15,0	19,5	36,0	10,5	28,0	14,0	17,0	5	0,400
34412012		M12	15,0	19,5	36,0	13,0	28,0	14,0	18,0	5	0,400
34412016		M16	15,0	19,5	36,0	17,0	30,0	16,0	22,0	5	0,360
34415008	150	M08	16,5	21,0	40,0	8,5	31,0	14,0	16,0	5	0,440
34415010		M10	16,5	21,0	40,0	10,5	31,0	14,0	17,0	5	0,440
34415012		M12	16,5	21,0	40,0	13,0	31,0	15,0	18,0	5	0,440
		M16	16,5	21,0	40,0	17,0	31,0	16,0	22,0	5	0,450
		M20	16,5	21,0	40,0	21,0	36,0	22,0	24,0	5	0,450
34418510	185	M10	19,0	24,0	42,0	10,5	35,0	18,0	22,0	5	0,750
34418512		M12	19,0	24,0	42,0	13,0	35,0	18,0	22,0	5	0,725
34418516		M16	19,0	24,0	42,0	17,0	35,0	18,0	22,0	5	0,933
		M20	19,0	24,0	42,0	21,0	39,0	22,0	24,0	5	0,933
34424010	240	M10	21,0	26,0	45,0	10,5	39,0	21,5	22,0	5	0,800
34424012		M12	21,0	26,0	45,0	13,0	39,0	21,5	22,0	5	0,800
34424016		M16	21,0	26,0	45,0	17,0	39,0	21,5	22,0	5	0,800
		M20	21,0	26,0	45,0	21,0	39,0	21,5	24,0	5	0,800