


Cable Lugs NARROW



Material : Elektrolytic Copper conformed to EN 13600
 Coating : Tin Plated
 Joint : Clamp Coupling
 Thickness : Very Thick
 Cable Entry : Standard

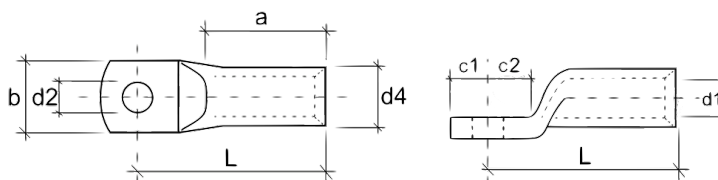

DG Art.nr.	Cable Section (mm ²)	Bolt	Dimensions								EH	Box pcs	Box Weight [kg]	Parcel pcs	Box Weight [kg]
			d1 [mm]	d4 [mm]	a [mm]	d2 [mm]	b [mm]	c1 [mm]	c2 [mm]	L [mm]					
34703506	35	M06	8,5	12,0	17,0	6,5	15,0	7,5	7,5	32,0	10	150	2,7	900	16,2
34705006	50	M06	10,0	14,0	19,0	6,5	15,0	10,0	10,0	37,0	10	100	2,9	600	17,4
34705008		M08	10,0	14,0	19,0	8,5	17,0	10,0	10,0	37,0	10	100	2,8	600	16,8
34705010		M10	10,0	14,0	19,0	10,5	19,0	11,5	12,0	39,0	10	100	3,1	600	18,6
34507006	70	M06	12,0	16,5	21,0	6,5	17,0	10,0	10,0	43,0	10	80	3,4	480	20,4
34507008		M08	12,0	16,5	21,0	8,5	17,0	10,0	10,0	43,0	10	80	3,3	480	19,8
34507010		M10	12,0	16,5	21,0	10,5	19,0	11,5	12,0	44,0	10	80	3,6	480	21,6
34507012		M12	12,0	16,5	21,0	13,0	19,0	13,0	13,0	46,0	10	80	3,4	480	20,4
34509506	95	M06	13,5	18,0	25,0	6,5	19,0	11,5	12,0	48,0	10	60	3,3	360	19,8
34509508		M08	13,5	18,0	25,0	8,5	19,0	11,5	12,0	48,0	10	60	3,3	360	19,8
34509510		M10	13,5	18,0	25,0	10,5	19,0	11,5	12,0	48,0	10	60	3,1	360	18,6
34509512		M12	13,5	18,0	25,0	13,0	19,0	13,0	13,0	49,0	10	60	3,1	360	18,6
34512006	120	M06	15,0	19,5	26,0	8,5	19,0	11,5	14,0	51,0	10	50	3,1	300	18,6
34512008		M08	15,0	19,5	26,0	10,5	19,0	11,5	14,0	51,0	10	50	3,0	300	18,0
34512010		M10	15,0	19,5	26,0	13,0	19,0	11,5	14,0	51,0	10	50	2,9	300	17,4
34512012		M12	15,0	19,5	26,0	15,0	19,0	14,0	14,0	51,0	10	50	3,0	300	18,0
34512006	150	M06	16,5	21,0	30,0	6,5	19,0	11,5	14,0	56,0	10	35	2,4	210	14,4
34512008		M08	16,5	21,0	30,0	8,5	19,0	11,5	14,0	56,0	10	35	2,4	210	14,4
34512010		M10	16,5	21,0	30,0	10,5	19,0	11,5	14,0	56,0	10	35	2,4	210	14,4
34512012		M12	16,5	21,0	30,0	13,0	19,0	15,0	15,0	57,0	10	35	2,5	210	15,0
34518510	185	M10	19,0	24,0	30,0	10,5	24,5	11,5	18,0	65,0	10	25	2,7	150	16,2
34518512		M12	19,0	24,0	30,0	13,0	31,0	18,0	18,0	65,0	10	25	2,8	150	16,8
34518516		M16	19,0	24,0	30,0	17,0	31,0	18,0	18,0	65,0	10	25	2,4	150	14,4
34524010	240	M10	21,0	26,0	35,0	10,5	39,0	21,5	19,0	72,0	10	20	2,5	120	15,0
34524012		M12	21,0	26,0	35,0	13,0	39,0	21,5	19,0	72,0	10	20	2,8	120	16,8
34524016		M16	21,0	26,0	35,0	17,0	39,0	21,5	19,0	72,0	10	20	2,7	120	16,2
34530010	300	M10	23,5	29,5	44,0	13,0	43,0	24,0	24,0	87,0	10	10	2,0	60	12,0
34530012		M12	23,5	29,5	44,0	15,0	43,0	24,0	24,0	87,0	10	10	2,3	60	13,8
34530016		M16	23,5	29,5	44,0	17,0	43,0	24,0	24,0	87,0	10	10	2,3	60	13,8